




Change how meeting rooms are booked

We now live in a digital era. Transform your meeting rooms to meet new expectations and modern lifestyles.

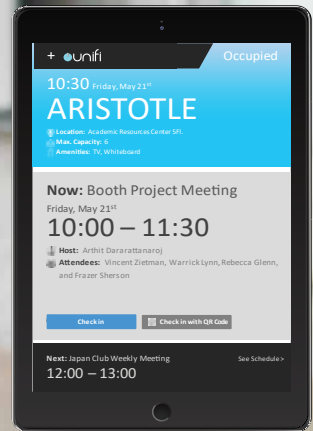

HOW IT WORKS

Book, change, and cancel from any devices and platforms from anywhere and at anytime. When it is time for a meeting, simply identify yourself on the tablet using your preferred method of smart card, QR code, or pin code.

JOIN THE MEETING

Invite friends and colleagues to your meetings, once invitations are accepted, they will become part of the meeting group and will be reminded with email alerts and notifications of relevant meeting updates.



Magnetic Lock

Full set of hardware with wall mounted smart tablet, EM door lock, exit switch, emergency break glass, controller box, and backup power supply.



Smart Integration

Integration with building automation system to automatically control lighting and air conditioning when meeting rooms are in / out of use.



Multi Platform

Enjoy the digital booking experience from anywhere, at anytime, and on any platforms and devices. Whether on PCs, smartphones, or tablets.



Admin System

Easily access back end administration to set-up meeting rooms, booking conditions, and user permissions as well as other managerial tasks.

Get In Touch With TraceoN :


Phone: 02-101-4338 Fax: 02-024-9094

Website: www.traceon.co.th Email: sales@traceon.co.th

Line: @traceon

Address: 589/2 Rama3 Road, Bangpongpan, Yannawa Bangkok 10120 Thailand





Smart Touch Tablet

Electromagnetic Door Lock

Exit & Emergency Switches

Controller & Power Supply Box

This 7" smart tablet can be wall mounted on all types of surfaces including glass and concrete. It has built-in smart card reader and camera for 1D and 2D barcode scan for user authentication with application designed for the best interactive touch user experience.

EM or electromagnetic door lock can be mounted on both glass and non-glass doors and for both single and double swing doors with EM locking system for one-way swing and electric drop bolt system for two-ways swing. EM locks are extremely sturdy and safe.

Exit switch is installed inside to release the EM door lock when pressed without needing to scan and identify users, making it easy and time-saving. In cases of system failure and emergency, emergency break glass switch can be activated to promptly release lock and open door.

The latest relay controller technology with in-house development of controller software ensure the proper working of the system and easily maintainable by our full service on-site engineers and technicians. And with built-in backup power supply to ensure availability during blackout.

Display: 7 inches IPS display
Resolution: 1024 x 600
Brightness: 350 cd/m2
RFID Reader: 13.56Mhz NFC/Mifare
Protocols: ISO14443A, 14443B, 15693
Processor: 8-core ARM cortex
CPU: A7 CPU, 1.2Ghz
RAM: 2GB
Nand Flash: 8GB
System: Google Android 6.0
Camera: 0.3MP
Video: H.264 2160p video decoding, multi-format FHD video decoding
Audio: Two speakers 2x1 Watt
Language: Support multi-languages
Interfaces: HDMI out, DC in power terminal (9V-36V), Ethernet interface (RJ45), USB socket host
Network: WIFI (802.11b/g/n), bluetooth V2.0+EDR/BT v3.0/BT v3.0+HS/BT v4.0, ethernet RJ45
Power Supply: DC 9V-36V
Accessories: Power adaptor
Optionals: POE, RS232, RS485, 3G, LED light, GPIO, temp & humidity sensors, second USB socket host
Mounts: In-wall, on-wall box, on-wall L-shape, desktop, glass-wall

EM Locking System
Input Voltage: DC 12V
Current: 0.5A
Time Delay: 0s, 2.5s, 5s
Materials: Aluminium Alloy & Steel
Weight: 788g
Size: 253*48*25mm
Holding Force: 600Lbs
Bracket: LZ Type

Electric Drop Bolt System
Input Voltage: DC 12V
Starting Current: 0.9A
holding Current: 0.3A
Time Delay: 0s, 2.5s, 5s
Materials: Aluminium Alloy & Steel
Weight: 788g
Size: 205*30*43mm

Exit Switch
Structure: Stainless steel panel and button
Current: 3A 36V DC
Contact: NO/COM
Size: 86*28*20mm
Mount: Applicable to hollow door frame and concealing box

Emergency Switch
Type: Break Glass
Structure: Plastic material with high heat resistance and good impact strength. Metal parts made from brass and phosphor bronze for corrosion resistance.
Current: 10A 36V DC
Contact: NO/NC COM
Size: 86*86*55mm
Weight: 0.2kg

Power Supply Control
Input Voltage: AC 220V 50Hz
Output Voltage: DC 12V
Output Current: 3A
Output Power: 36W
Operating Temp: -20 C - +60 C
Operating Humidity: <90%
Time Delay: 0 - 15s
Size: 21*16*7.5cm

Battery Pack
Type: Rechargeable Sealed Lead Acid Battery
Voltage: 12V
Current: 7AH
Charging Current: 3.00A
Charging Temp: 25 C
Size: 151*65*94mm



Get In Touch With Traceon :

Phone: 02-101-4338 Fax: 02-024-9094
 Website: www.traceon.co.th Email: sales@traceon.co.th
 Line: @traceon
 Address: 589/2 Rama3 Road, Bangpongpan, Yannawa Bangkok 10120 Thailand

